


Diaphragm Valve – SRL Straight Through - Flanged Undrilled

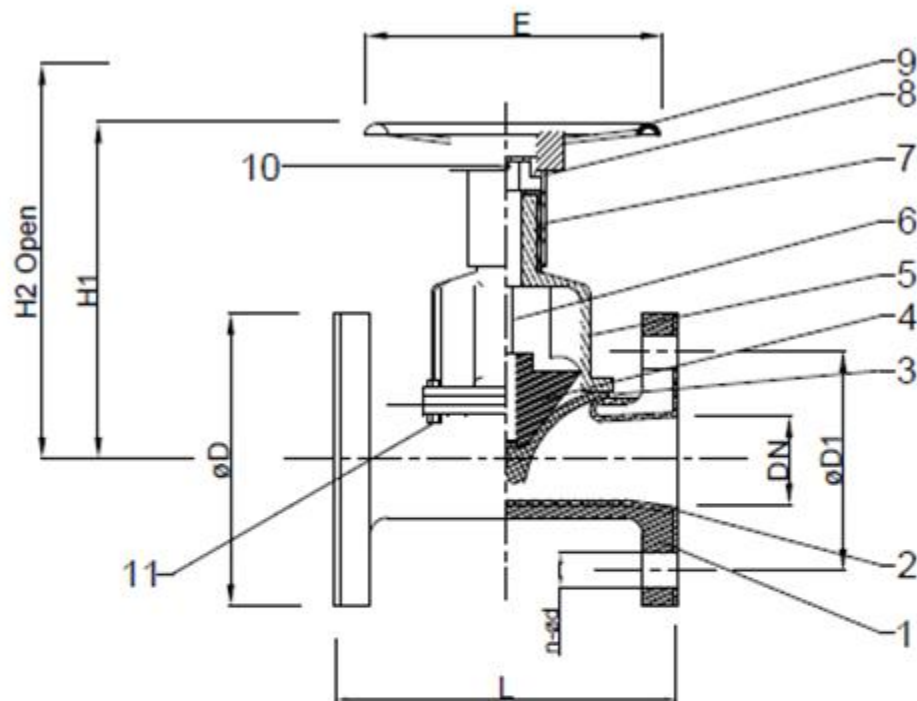

DN	DN50	DN80	DN100	DN150	DN200	DN250	DN300
L	194	258	309	412	527	641	755
Weight	11	22	29	59	102	180	302
øD	185	198	220	283	335	395	445
øD1	125	180	180	240	295	350	400
n-ød	4-19	8-19	8-19	8-23	8-23	12-23	12-23
E	ø160	ø250	ø250	ø400	ø400	ø500	ø630
H1	178	245	270	360	560	740	830
H2	192	270	300	400	610	820	930

- Design and manufacture: BS5156
- Face to Face dimension: EN558-1 (ex BS5156)
- Flanges connection: BS4504
- Working pressure:
- DN50 - DN100: 1.0MPa
- DN125 - DN150: 0.6MPa
- DN200 - DN300: 0.35MPa

NO	DESCRIPTION:	QTY:	MATERIAL:	REMARKS:
1	BODY	1	GG25	
2	LINING	1	NATURAL RUBBER	Q-GRADE
3	DIAPHRAGM	1	NATURAL RUBBER	A-GRADE
	DISC	1	GG25	
5	BONNET	1	GG25	
6	STEM	1	STAINLESS STEEL	
7	COVER 1	1	ABS	
8	COVER 2	1	ABS	
9	HANDWHEEL	1	GGG40	
10	TAPER PIN	1	CAST STEEL	
11	BOLT	1	CAST STEEL	

DRAWN BY: W.J.R.
CHECKED BY: S.L.
APPROVED BY: S.L.

THIS DRAWING AND DESIGN IS THE PROPERTY OF SURE SEAL AND MUST NOT BE DISCLOSED TO ANY THIRD PARTY WITHOUT THE CONSENT OF THE COMPANY IN WRITING AND IS TO BE RETURNED ON REQUEST

SURE SEAL

TITLE:
**STRAIGHT-THROUGH DIAPHRAGM VALVE
KB TYPE RUBBER LINED**



NO: REVISION: SIG: DATE: DRAWING NO: GMF-00 SSFB PART NO: SHEET: SIZE: SCALE: N.T.S REV: